

600S/660SJ *ALL TERRAIN*

MID-SIZE TRACKED TELESCOPIC BOOM LIFTS



- Rugged tracked all-terrain telescopic boom lifts
- Powerful 4-track drive and oscillating axle
- Independent rubber tracks
- Dual envelope for maximum lift capacities
- Excellent working envelope for maximum versatility

 **snorkel**[™]
www.snorkellifts.com

MID-SIZE TRACKED TELESCOPIC BOOM LIFTS

600S/660SJ ALL TERRAIN



DIMENSIONS	600S ALL TERRAIN	660SJ ALL TERRAIN
Max. working height	66 ft 8 in	71 ft 11 in
Max. platform height (A)	60 ft 8 in	65 ft 11 in
Max. horizontal reach	52 ft 7 in	58 ft 5 in
Platform size	8 ft x 3 ft	8 ft x 3 ft
Transport width	7 ft 4 in	7 ft 4 in
Overall width (B)	8 ft 1 in	8 ft 1 in
Overall length (C)	30 ft 1 in	33 ft 3 in
Transport length	30 ft 1 in	27 ft 3 in
Stowed height (D)	8 ft 7 in	8 ft 7 in
Transport height	8 ft 7 in	9 ft 9 in
Ground clearance	17.5 in	17.5 in

PERFORMANCE	600S ALL TERRAIN	660SJ ALL TERRAIN
Platform capacity (SWL) unrestricted	600 lbs	600 lbs
Platform capacity (SWL) restricted	1,000 lbs	1,000 lbs
Max. drive height	60 ft 8 in	65 ft 11 in
Max. wind speed	28 mph	28 mph
Max. drive speed (stowed)	3.5 mph	3.5 mph
Max. drive speed (elevated)	0.6 mph	0.6 mph
Jib length	n/a	5 ft 6 in
Jib working arc	n/a	135°
Platform rotation	150°	150°
Superstructure rotation (continuous)	360°	360°
Raise/lower time	50/50 sec	50/50 sec
Tailswing	47 in	47 in
Gradeability	45%	45%
Inside turning radius	19 ft 6 in	19 ft 6 in
Outside turning radius	27 ft 6 in	27 ft 6 in
Tires	Independent rubber tracks	
Controls	Proportional drive, raise, slew, extend, jib and platform rotate	
Drive system	4-track drive	

POWER	600S ALL TERRAIN	660SJ ALL TERRAIN
Power source	Deutz 2.9L 74hp (55kW) diesel - Tier 4 Final	
Auxiliary power unit	12V DC	12V DC

WEIGHT	600S ALL TERRAIN	660SJ ALL TERRAIN
Weight	28,659 lbs	30,250 lbs

WORKING ENVELOPES

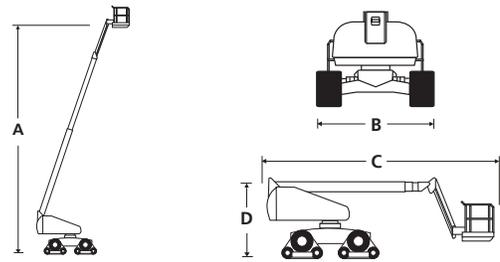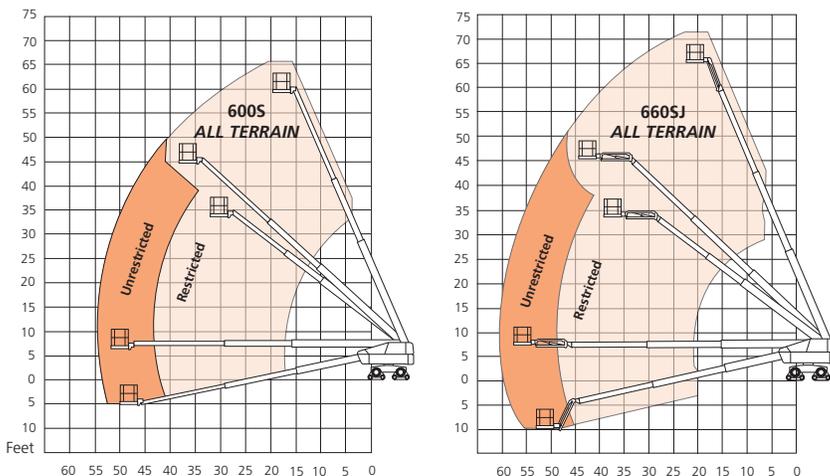

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- 5ft 6in 135° jib (660SJ only)
- Hydraulic platform rotation
- Hydraulic oil cooler
- Oscillating axle (8" of oscillation)
- 4-track drive
- Swing-out engine tray
- All proportional controls
- Power line to platform
- Platform overload system
- 5° tilt alarm & cut out
- Hour meter & on-board diagnostics display
- DC emergency operation
- Tri-entry platform
- Flashing amber light
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- Airline to platform
- AC generator 110V/220V 2kW
- Aircraft package
- Deluxe aircraft package
- Cold weather package
- Extreme cold weather package
- Extreme environment package
- Glazier package
- Light package
- 10kW generator package
- 10kW generator/welder package
- Environmental hydraulic oil
- Tool tray
- Pipe rack
- Snorkel OnSite™ telematics

snorkel www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-free: 1 (800) 255-0317
Fax: 1 (785) 989-3070
Email: sales.usa@snorkellifts.com