
### **S3019E** ELECTRIC DRIVE SLAB SCISSOR LIFT



- Revolutionary design that redefines the electric scissor lift
- All-electric drive and steering no hydraulic hoses
- Features a sunken scissor stack for low platform step-in height
- Drives through a standard door way without folding handrails
- Zero inside turning radius for maximum maneuverability

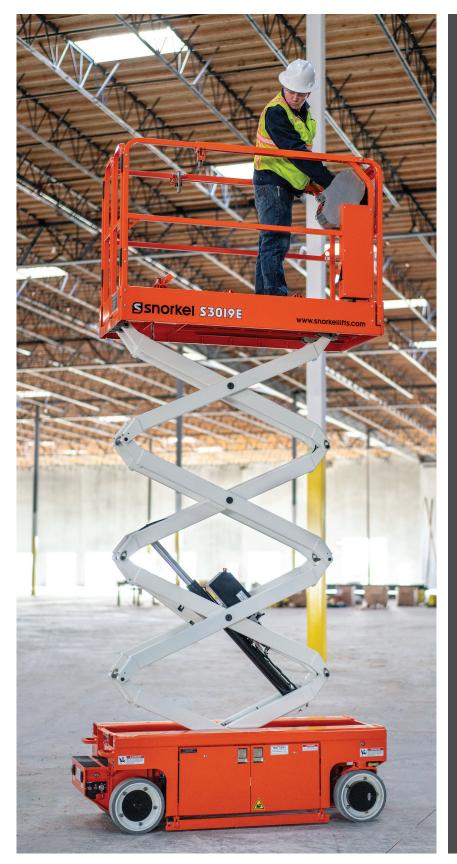

### **ELECTRIC DRIVE SLAB SCISSOR LIFT**


DIMENSIONS	\$3019E
Max. working height	25 ft
Max. platform height ( <b>A</b> )	19 ft
Platform size (stowed)	24 in x 64.5 in
Platform size (extended)	24 in x 100.5 in
Deck extension length	36 in
Overall length (C) (with step)	75 in
Overall width ( <b>D</b> )	30.5 in
Stowed height ( <b>B</b> )	69.1 in
Ground clearance (stowed)	3 in
Ground clearance (elevated)	0.6 in


PERFORMANCE	
Platform capacity (SWL)	550 lbs
Max. wind speed	28 mph
Max. drive height	19 ft
Max. drive speed (stowed)	1.5 mph
Max. drive speed (elevated)	0.5 mph
Raise/lower time	30/44 sec
Gradeability	25%
Inside turning radius	0 in
Outside turning radius	69.5 in
Tires	12.75 x 4 non-marking solid rubber
Controls	proportional
Drive system	2-wheel electric drive
POWER	
Power source	24V DC battery electric
Charger	90 - 240V, 25amp


#### **TURNING RADIUS**

WEIGHT

Weight







#### **STANDARD FEATURES**

- All electric drive •
- Electric steer
- No hydraulic hoses
- Roll-out deck extension with dual locks
- Zero inside turning radius •
- Non-marking tires •
- Swing-out service trays •
- Saloon-door style entry gates •
- Descent alarm •
- All motion alarm
- 2 persons indoor •
- 1 person outdoor •
- Proportional controls, including descent •
- Power line to platform •
- Flashing amber light •
- Hour meter & on-board diagnostics display •
- Integrated battery charger
- Battery condition indicator •
- Crane & forklift points
- Dual lanyard attachments points •
- 2 year parts & labor, 5 year structural warranty •
- ANSI compliant •

#### **OPTIONS**

3,485 lbs

- Special paint colors •
- Airline to platform •
- Environmental hydraulic oil •
- Snorkel OnSite™ telematics

## www.snorkellifts.

P.O. Box 1160 St.Joseph, MO 64502-1160, USA Tel: 1 (785) 989-3000 Toll-free: 1 (800) 255-0317 Fax: 1 (785) 989-3070 Email: sales.usa@snorkellifts.com

ANSI Specification Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. ©Snorkel 2021 Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance

01/2021

5.COM

# S3019E