

# SL26RTE/SL30RTE

## ELECTRIC SPEED LEVEL



- Lithium-ion electric Speed Level sigma lift
- Quiet and clean zero emissions
- Fully charged in 5-8 hours
- Climbs gradients of up to 50%
- Auto-levelling without the need for stabilizers



**snorkel**<sup>TM</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

# ELECTRIC SPEED LEVEL

# SL26RTE/SL30RTE

DIMENSIONS	SL26RTE	SL30RTE
Max. working height	31 ft 6 in	35 ft 4 in
Max. platform height (A)	25 ft 6 in	29 ft 4 in
Platform size (stowed)	5 ft 8 in x 12 ft	5 ft 8 in x 13 ft 11 in
Platform size (extended) (E)	5 ft 8 in x 15 ft	n/a
Extension deck length	3 ft	n/a
Overall width (D)	7 ft	7 ft
Overall length (C)	12 ft 5 in	14 ft 1 in
Stowed height (B)	8 ft 6 in	8 ft 6 in
Min. height (guardrails folded)	65 in	65 in
Chassis ground clearance	12 in	12 in
Axle ground clearance	7.6 in	7.6 in



PERFORMANCE	SL26RTE	SL30RTE
Platform capacity (SWL)	1,500 lbs	1,300 lbs
Max. wind speed	28 mph	28 mph
Max. drive height	25 ft 6 in	29 ft 4 in
Max. drive speed (stowed)	3.3 mph	3.3 mph
Max. drive speed (elevated)	0.5 mph	0.5 mph
Raise/lower time	21/32 sec	24/36 sec
Gradeability	50%	50%
Max. levelling, front to rear	9°	9°
Max. levelling, side to side	13°	13°
Inside turning radius	12 ft 10 in	12 ft 10 in
Outside turning radius	18 ft 6 in	18 ft 6 in
Tires	26 x 12.00 - 12 foam filled	
Controls	digital proportional joystick	
Drive system	4-wheel drive with hydraulic motors and flow dividers	

POWER	SL26RTE/SL30RTE
Power source	222Ah Li-ion batteries with integrated BMS
Operating temperature	(-)77°F to (+)140°F
Charger	high frequency smart on-board 50A battery charger

MOTOR	SL26RTE/SL30RTE
Motor	AC electric motor

WEIGHT	SL26RTE	SL30RTE
Weight	7,826 lbs	7,605 lbs

## LEVELING CAPABILITIES

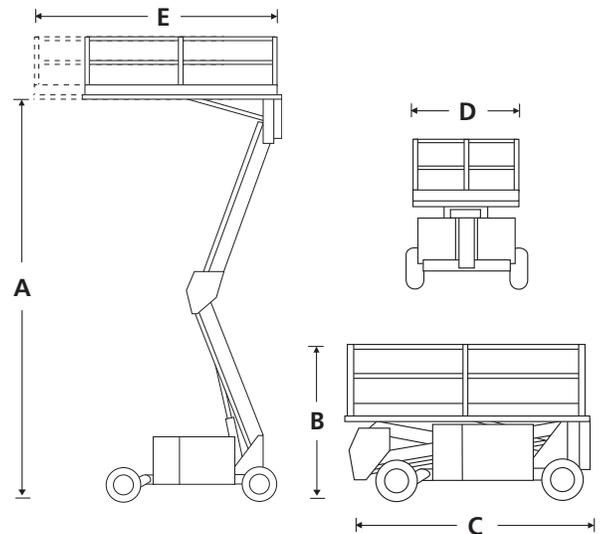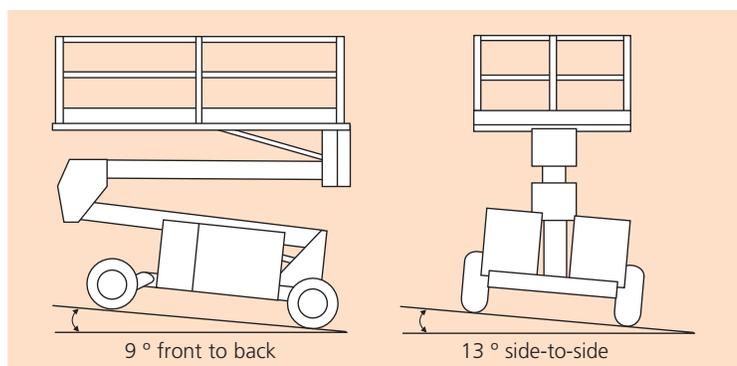

## STANDARD FEATURES

- Two lithium-ion battery systems 222Ah
- Automatic powered platform levelling
- Powerful 4-wheel drive
- Oscillating front axle
- High grip, open tread deck (SL30RTE only)
- Roll-out deck extension (SL26RTE only)
- Descent alarm
- High grip non-marking, all terrain tires
- Digital proportional controls
- Power line to platform
- Fold-down guardrails
- All motion alarm
- Hour meter & on-board diagnostics display
- Flashing amber light
- 2000 charging cycles / 2 year\* lithium battery warranty
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

## OPTIONS

- Special paint colors
- Environmental hydraulic oil
- Additional 111Ah battery system
- Tunnel package (RTE)
- Extra range tunnel package (RTE)
- Work light package
- Driving light package
- Extreme environment package
- Aluminum platform floor (SL26RTE)
- Snorkel OnSite™ telematics

**snorkel** [www.snorkellifts.com](http://www.snorkellifts.com)

P.O. Box 1160  
 St. Joseph, MO 64502-1160, USA  
 Tel: 1 (785) 989-3000  
 Toll-free: 1 (800) 255-0317  
 Fax: 1 (785) 989-3070

Email: [sales.usa@snorkellifts.com](mailto:sales.usa@snorkellifts.com)