# SR1054

### **ROUGH TERRAIN TELEHANDLER**



- Full-time 4-wheel drive
- Fully enclosed cab
- Power assisted steering
- Proportional joystick
- Simple to operate & maintain



### **ROUGH TERRAIN TELEHANDLER**

## SR1054

CAPABILITIES	SR1054
Max. lift capacity	10,000 lbs
Max. lift height ( <b>A</b> )	53 ft 9 in
Max. forward reach	41 ft 4 in

DIMENSIONS	
Overall width ( <b>B</b> )	7 ft 6 in
Stowed height ( <b>C</b> )	8 ft 5 in
Length to fork face ( <b>D</b> )*	21 ft 8 in
Wheelbase	9 ft 8 in
Ground clearance	14 in


PERFORMANCE	
Max. drive speed	18 mph
Raise/lower time	16/10.8 sec
Frame leveling	11°
Hydraulic flow (per minute)	32 gal
Hydraulic pressure	3,336 psi
Hydraulic oil capacity	39.5 gal
Fuel capacity	31.7 gal
Outside turning radius	13 ft 8 in
Tires	445/65 - 22.5"


POWER				
Power	source			

Deutz TCD 3.6L Tier 4 Final diesel 100 hp

WEIGHT	
Weight	26,852 lbs

#### LOAD CHART

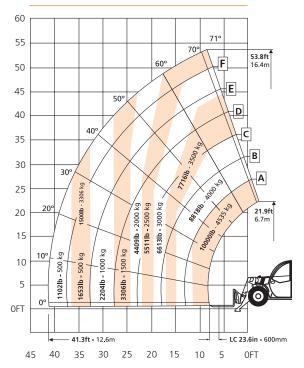



#### STANDARD FEATURES

- Fully enclosed cab with air conditioning & heat
- Window wipers
- Running lights
- Manual pintle hitch
- Backup alarm
- PEB electrical boom socket
- Constant front hydraulic flow
- Heater plug
- B class carriage adapter
- Hydraulic attachment quick disconnect
- LED front and rear work lights
- LED work lights on boom (2)
- Axle mounted outriggers
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

#### **OPTIONS**

- Special paint colors
- Multiple options for carriages, tires, fork tines and attachments
- Snorkel OnSite™ telematics

## **S**snorkel

P.O. Box 1160 St.Joseph, MO 64502-1160, USA

Tel: 1 (785) 989-3000 Toll-free: 1 (800) 255-0317

Fax: 1 (785) 989-3070 Email: sales.usa@snorkellifts.com