

# TL37J

## TOWABLE BOOM LIFT



- High specification trailer mounted boom lift
- Excellent working envelope including a jib boom
- Hydraulic outriggers for simple set-up
- Proportional controls for easy operation
- Range of power source options

 **snorkel**<sup>™</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

# TOWABLE BOOM LIFT


# TL37J

DIMENSIONS	TL37J
Max. working height	12.9m
Max. platform height	10.9m
Max. working outreach	5.6m
Platform width (C)	1.14m
Platform depth (D)	0.7m
Outrigger footprint (A x B)	3.9m x 3.3m
Towing width (E)	1.61m
Towing length (F)	6.4m
Stowed height (G)	2.1m

PERFORMANCE	
Platform capacity (SWL)	215kg
Max. wind speed	12.5m/s
Jib length	1.3m
Jib arc	130°
Platform rotation	160°
Turret rotation (non-continuous)	640°
Tires	185R14C
Controls	hydraulic proportional

POWER	
Power source	24V DC battery (4 x 6V 225Ah batteries)
Power options	gasoline; bi-energy (combustion & battery); AC electric

WEIGHT	
Weight (DC battery)	1,586kg

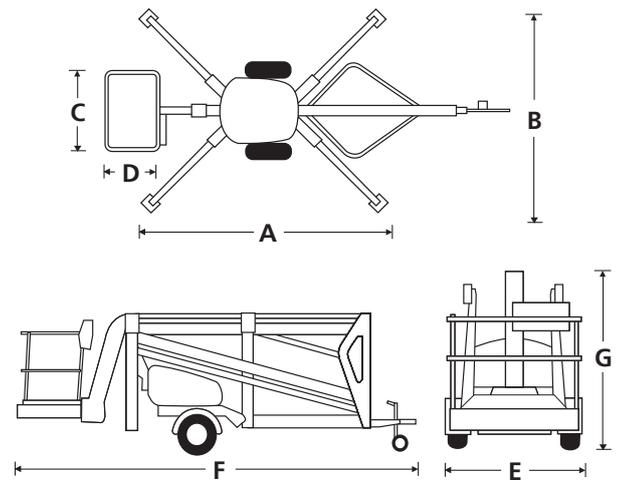


## STANDARD FEATURES

- 1.3m jib with 130° working arc
- Hydraulic stabilizers
- In-line boom design for maximum rigidity
- Hand pump emergency lowering from platform
- Lock valves on all hydraulic cylinders
- Dual lanyard attachment points
- Power line to platform
- Proportional live hydraulic controls
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

## OPTIONS

- Special paint colors
- Friction drive assist package
- Flashing amber light
- Work lights in platform
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Snorkel OnSite™ telematics

## WORKING ENVELOPE

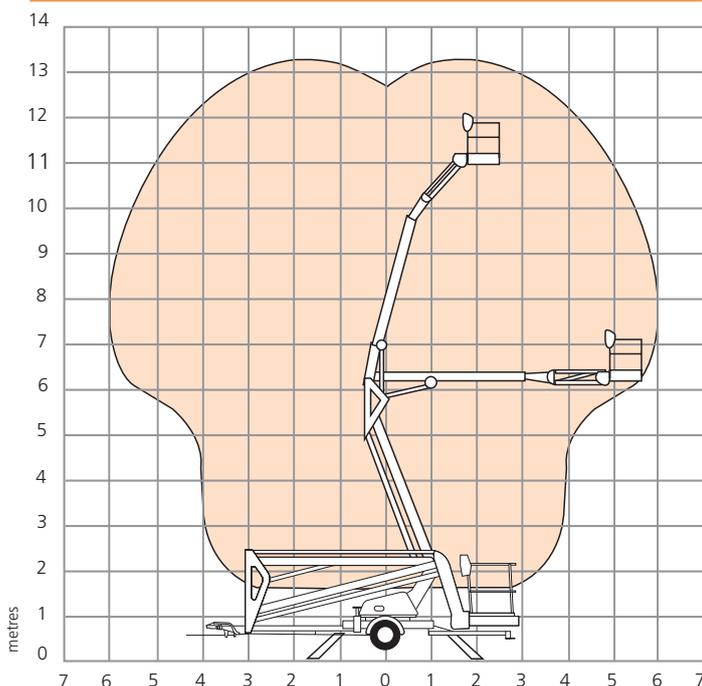

**snorkel** [www.snorkellifts.com](http://www.snorkellifts.com)

P.O. Box 1160  
St. Joseph, MO 64502-1160, USA  
Tel: 1 (785) 989-3000  
Toll-free: 1 (800) 255-0317  
Fax: 1 (785) 989-3070  
Email: sales.usa@snorkellifts.com