
S9031RT-HC/S9043RT-HC ULTRA-HIGH CAPACITY ROUGH TERRAIN SCISSOR LIFTS



- Ultra-high capacity, large deck rough terrain scissor lifts
- Excellent rough terrain performance
- Heavy duty design
- Dual powered extension decks
- Ideal for construction applications

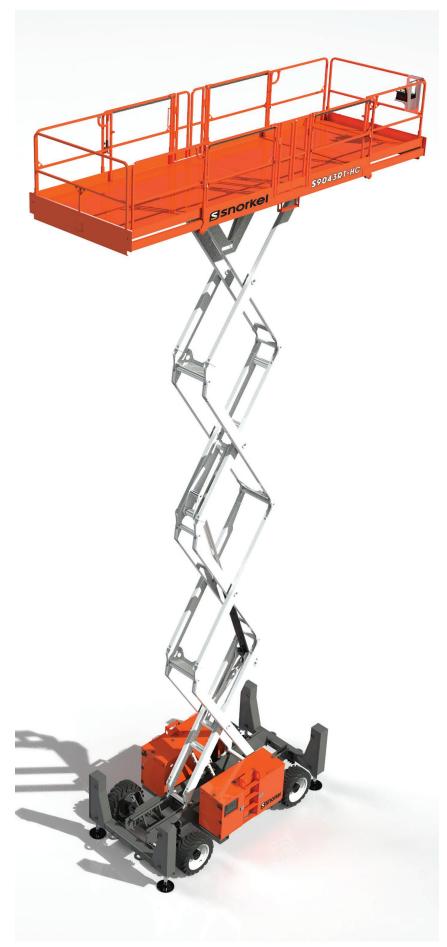

ULTRA-HIGH CAPACITY ROUGH TERRAIN SCISSOR LIFTS

DIMENSIONS	S9031RT-HC*	S9043RT-HC*
Max. working height	11.4m	15.1m
Max. platform height (A)	9.4m	13.1m
Platform size (stowed)	2.28m x 4.87m	
Platform size (dual decks extended)	2.28m x 8.23m	
Extension deck length	1.37m	1.37m
Overall width (B)	2.28m	2.28m
Overall length (D)	4.87m	4.87m
Stowed height (C)	2.77m	2.77m
Min. height (guardrails folded)	1.9m	1.9m
Ground clearance	356mm	356mm

PERFORMANCE		
Platform capacity (SWL)	1,814kg	1,587kg
Max. drive height	9.4m	13.1m
Max. wind speed	12.5m/s	12.5m/s
Max. drive speed (stowed)	6.7km/h	6.7km/h
Max. drive speed (elevated)	0.96km/h	0.96km/h
Raise/lower time	30/20 sec	40/25 sec
Gradeability	50%	50%
Max. stabilizer levelling, front to rear	6°	۶°
Max. stabilizer levelling, side to side	14°	12°
Inside turning radius	2.4m	2.4m
Outside turning radius	5.6m	5.6m
Tires	13 x 36 foam filled	
Controls	proportional joystick	
Drive system	4-wheel drive	


POWER

Power source

WEIGHT		
Weight	6,803kg	7,711kg


Kubota diesel engine

TURNING RADIUS



ANSI Specification © Snorkel 2021 Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance. *Preliminary specifications – confirm at time of ordering.

S9031RT-HC/ S9043RT-HC



STANDARD FEATURES

- 4-wheel drive
- 4 hydraulic stabilizers with automatic levelling
- Dual powered extension decks
- Proportional controls
- Foam filled tires
- Power line to platform
- Platform overload system
- Drive motion alarm
- Descent alarm
- Locking oscillating axle
- Manual lowering valve
- Flashing amber light
- Fold down guardrails
- Dual lanyard attachment points
- Hour meter & on-board diagnostics display
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- Non-marking foam filled tires
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Cold weather package (block heater + battery warm up)
- Hydraulic generator 110V 2kW
- 12kW generator package



P.O. Box 1160 St.Joseph, MO 64502-1160, USA Tel: 1 (785) 989-3000 Toll-free: 1 (800) 255-0317 Fax: 1 (785) 989-3070 Email: sales.usa@snorkellifts.com