

AB60J

ARTICULATED BOOM LIFTS




- Tough & reliable diesel articulating boom lift
- Powerful 4-wheel drive for rough terrain
- Robust, rental-tough design
- Simple to operate and maintain
- Ideal for both maintenance and construction applications

 **snorkel**[™]
www.snorkellifts.com

ARTICULATED BOOM LIFTS

AB60J

DIMENSIONS	AB60J
Max. Working Height	65' 9"
Max. Platform Height	59' 9"
Max. Horizontal Reach	43' 1"
Clearance height at max. outreach	19' 6"
Platform Size	8' x 3'
Overall Length (B)	29' 2"
Overall Width (C)	7' 11.5"
Stowed Height (A)	8' 3"
Ground Clearance	12"

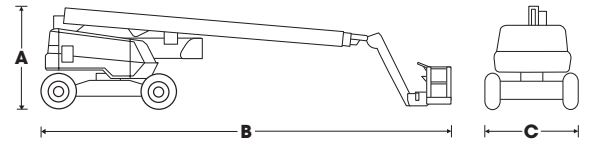

PERFORMANCE	
Platform Capacity (SWL)	500 lbs
Max. Drive Height	59' 9"
Max. Wind Speed	28 mph
Max. Drive Speed (Stowed)	3.2 mph
Max. Drive Speed (Elevated)	0.6 mph
Gradeability	20%
Jib Length	6'
Jib Arc	75°
Platform Rotation	180°
Superstructure Rotation (continuous)	360°
Tailswing (riser boom elevated)	0"
Tailswing (riser boom stowed)	60"
Raise/Lower Time	125 / 121 seconds
Tires	15 x 19.5 foam-filled lug
Controls	Proportional joystick, drive, lift & rotation
Drive System	4-wheel drive

POWER	
Power Source	Kubota V2403 65hp diesel – T4F

WEIGHT	
Weight	24,800 lbs

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- Hydraulic platform rotation
- 4-wheel drive
- Proportional drive, lift & swing
- Lanyard attachment points
- Horn
- Foam-filled tires
- Power line to platform
- Tilt alarm & cut out
- Platform overload system
- Drive motion alarm
- Flashing amber strobe
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- Airline to platform
- Non-marking tires
- AC generator 110V/2.5kW (single phase)
- Tool tray
- Environmental hydraulic oil
- Special paint colors

WORKING ENVELOPE

