

AB60J

ARTICULATED BOOM LIFTS




- Tough & reliable diesel articulating boom lift
- Powerful 4-wheel drive for rough terrain
- Robust, rental-tough design
- Simple to operate and maintain
- Ideal for both maintenance and construction applications

 **snorkel**[™]
www.snorkellifts.com

ARTICULATED BOOM LIFTS

AB60J

DIMENSIONS	AB60J
Max. Working Height	20.04m
Max. Platform Height	18.21m
Max. Horizontal Reach	13.13m
Clearance height at max. outreach	5.94m
Platform Size	2.44m x 0.91m
Overall Length (B)	8.89m
Overall Width (C)	2.42m
Stowed Height (A)	2.51m
Ground Clearance	300mm

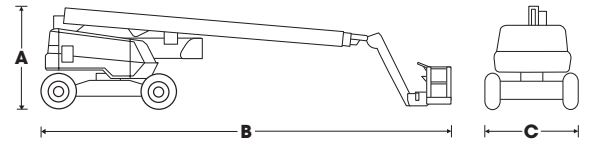

PERFORMANCE	
Platform Capacity (SWL)	227kg
Max. Drive Height	18.21m
Max. Wind Speed	12.5m/s
Max. Drive Speed (Stowed)	1.43m/s
Max. Drive Speed (Elevated)	0.26m/s
Gradeability	20%
Jib Length	1.8m
Jib Arc	75°
Platform Rotation	180°
Superstructure Rotation (continuous)	360°
Tailswing (riser boom elevated)	0m
Tailswing (riser boom stowed)	1.52m
Raise/Lower Time	125 / 121 seconds
Tires	15 x 19.5 foam-filled lug
Controls	Proportional joystick, drive, lift & rotation
Drive System	4-wheel drive

POWER	
Power Source	Kubota V2403 65hp diesel – T4F

WEIGHT	
Weight	453kg

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- Hydraulic platform rotation
- 4-wheel drive
- Proportional drive, lift & swing
- Lanyard attachment points
- Horn
- Foam-filled tires
- Power line to platform
- Tilt alarm & cut out
- Platform overload system
- Drive motion alarm
- Flashing amber strobe
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- Airline to platform
- Non-marking tires
- AC generator 110V/2.5kW (single phase)
- Tool tray
- Environmental hydraulic oil
- Special paint colors

WORKING ENVELOPE

