

600S/660SJ *ALL TERRAIN*

ALL-TERRAIN TELESCOPING BOOM LIFTS



- Rugged all-terrain telescoping boom lifts
- Powerful 4-track drive and oscillating axle
- Independent rubber tracks
- Dual envelope for maximum lift capacities
- Simple to operate and easy to maintain

snorkel[™]
www.snorkellifts.com

ALL-TERRAIN TELESCOPING BOOM LIFTS

600S/660SJ ALL TERRAIN



DIMENSIONS	600S AT	660SJ AT
Max. Working Height (A)	66' 8" (20.32m)	71' 7" (21.81m)
Max. Platform Height	60' 8" (18.49m)	66' 3" (20.19m)
Max. Horizontal Reach	52' 7" (16.02m)	58' 1" (17.70m)
Platform Size	8' x 3' (2.44m x 0.91m)	
Stowed Length (B)	30' 1" (9.17m)	33' 3" (10.13m)
Stowed Width (C)	8' 1" (2.46m)	
Stowed Height (D)	8' 7" (2.61m)	
Transport Length (Jib Stowed)	30' 1" (9.17m)	27' 3" (8.30m)
Transport Height (Jib Stowed)	8' 7" (2.61m)	9' 9" (2.97m)
Transport Width	7' 4" (2.23m)	
Ground Clearance	13.5" (343mm)	

PERFORMANCE		
Platform Capacity (Restricted)	1,000 lbs (454kg)	
Platform Capacity (Unrestricted)	600 lbs (272kg)	
Max. Drive Height	60' 8" (18.49m)	65' 11" (19.99m)
Max. Wind Speed	28mph (12.5m/s)	
Max. Drive Speed (Stowed)	3.5mph (5.63km/h)	
Max. Drive Speed (Elevated)	0.6mph (0.96km/h)	
Gradeability	45%	
Jib Length	n/a	5' 6" (1.67m)
Jib Arc	n/a	135° (+70°/-65°)
Platform Rotation	176° (86° CW / 90° CCW)	
Superstructure Rotation	360° continuous	
Tailswing	47" (1.19m)	
Inside Turning Radius	19' 6" (5.94m)	
Outside Turning Radius	27' 6" (8.38m)	
Raise / Lower Time	50 / 50 seconds	
Tires	Independant rubber tracks	
Controls	Proportional	
Drive System	4WD	

POWER	
Power Source	74hp (55kW) Deutz turbo-diesel engine

WEIGHT		
Weight	28,659 lbs (13,000kg)	30,250 lbs (13,721kg)

WORKING ENVELOPE

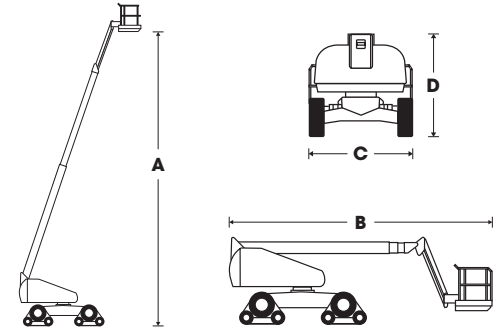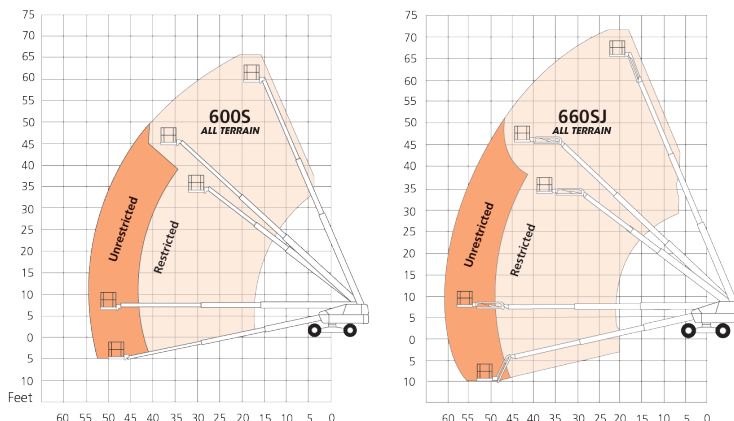

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- 5' 6", 135° jib (660SJ)
- Hydraulic platform rotation
- Hydraulic oil cooler
- Oscillating axle (8" of oscillation)
- 4-track drive
- All Proportional controls
- Swing-out engine tray
- Horn
- Hour meter & on-board diagnostics display
- Power line to platform
- Platform overload system
- Tilt alarm & cut out
- Tri-entry platform
- DC emergency operation
- Motion alarm
- Flashing amber strobe
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- 11' platform (replaces standard 8' platform)
- 11' platform (added to standard 8' platform)
- 20kW generator 208/230V (3-phase)
- Airline to platform
- AC generator 110V/2.5kW (single-phase)
- AC generator 208V/7.5kW (3-phase)
- NOTE: 275/280A welder-ready
- Environmental hydraulic oil
- Special paint colors
- Tool tray

snorkel

www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-Free: 1 (800) 255-0317
Email: sales.usa@snorkellifts.com