

600S/660SJ

TELESCOPING BOOM LIFTS



- Rugged all-terrain telescoping boom lifts
- Powerful 4-wheel drive
- Ultra-tight turning radius
- Available with or without jib
- Dual envelope for maximum lift capacities

snorkel[™]
www.snorkellifts.com

TELESCOPING BOOM LIFTS

600S/660SJ



DIMENSIONS	600S	660SJ
Max. Working Height (A)	66' (20.11m)	71' 7" (21.81m)
Max. Platform Height	60' (18.29m)	65' 7" (19.99m)
Max. Horizontal Reach	52' 7" (16.02m)	58' 1" (17.70m)
Platform Size	8' x 3' (2.44m x 0.91m)	
Stowed Length (B)	30' 1" (9.17m)	33' 3" (10.13m)
Stowed Width (C)	8' 1" (2.46m)	
Stowed Height (D)	8' 3" (2.51m)	
Transport Length (Jib Stowed)	30' 1" (9.17m)	27' 5" (8.36m)
Transport Height (Jib Stowed)	8' 3" (2.51m)	9' 6" (2.89m)
Transport Width	7' 4" (2.23m)	
Ground Clearance	13.5" (343mm)	

PERFORMANCE		
Platform Capacity (Restricted)	1,000 lbs (454kg)	
Platform Capacity (Unrestricted)	600 lbs (272kg)	
Max. Drive Height	60' (18.29m)	65' 7" (19.99m)
Max. Wind Speed	28mph (12.5m/s)	
Max. Drive Speed (Stowed)	3.5mph (5.63km/h)	
Max. Drive Speed (Elevated)	0.6mph (0.96km/h)	
Gradeability	50%	
Jib Length	n/a	5' 6" (1.67m)
Jib Arc	n/a	135° (+70°/-65°)
Platform Rotation	176° (86° CW / 90° CCW)	
Superstructure Rotation	360° continuous	
Tailswing	47" (1.19m)	
Inside Turning Radius	6' 9" (2.06m)	
Outside Turning Radius	16' 5" (5.00m)	
Raise / Lower Time	50 / 50 seconds	
Tires (Foam-filled lug)	355/55 D625	
Controls	Proportional	
Drive System	4WD	

POWER	
Power Source	74hp (55kW) Deutz turbo-diesel engine

WEIGHT		
Weight	24,640 lbs (11,176kg)	28,620 lbs (12,982kg)

WORKING ENVELOPE

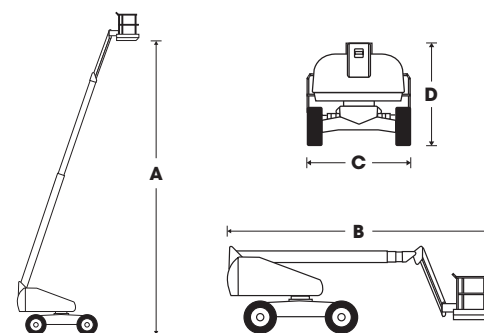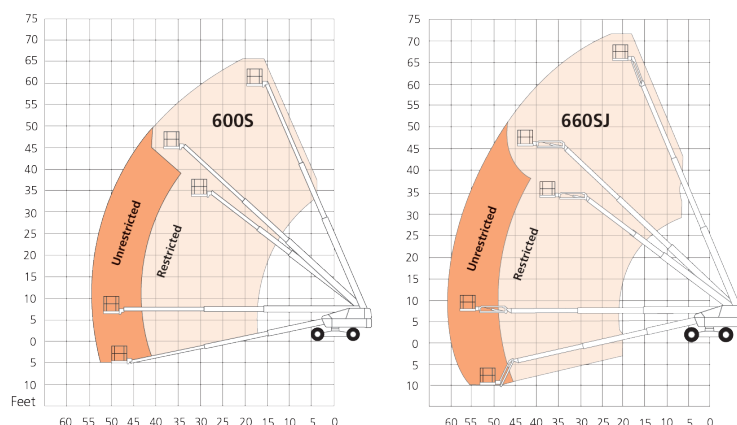

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- 5' 6", 135° jib (660SJ)
- Hydraulic platform rotation
- Hydraulic oil cooler
- Oscillating axle (8" of oscillation)
- 4-wheel drive
- All Proportional controls
- Swing-out engine tray
- Horn
- Hour meter & on-board diagnostics display
- Power line to platform
- Platform overload system
- Tilt alarm & cut out
- Tri-entry platform
- DC emergency operation
- Motion alarm
- Flashing amber strobe
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- 10kW Generator package
- 10kW Generator package w/ welder
- 11' platform (replaces standard 8' platform)
- 11' platform (added to standard 8' platform)
- 20kW generator 208/230V (3-phase)
- Airline to platform
- AC generator 110V/2.5kW (single-phase)
- AC generator 208V/7.5kW (3-phase)
- NOTE: 275/280A welder-ready
- Environmental hydraulic oil
- Non-marking tires
- PFAS
- Special paint colors
- Tool tray
- Turf flotation tires & TPMS

snorkel

www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-Free: 1 (800) 255-0317
Email: sales.usa@snorkellifts.com