


# S3013 MINI

## LITHIUM ELECTRIC SLAB SCISSOR LIFT

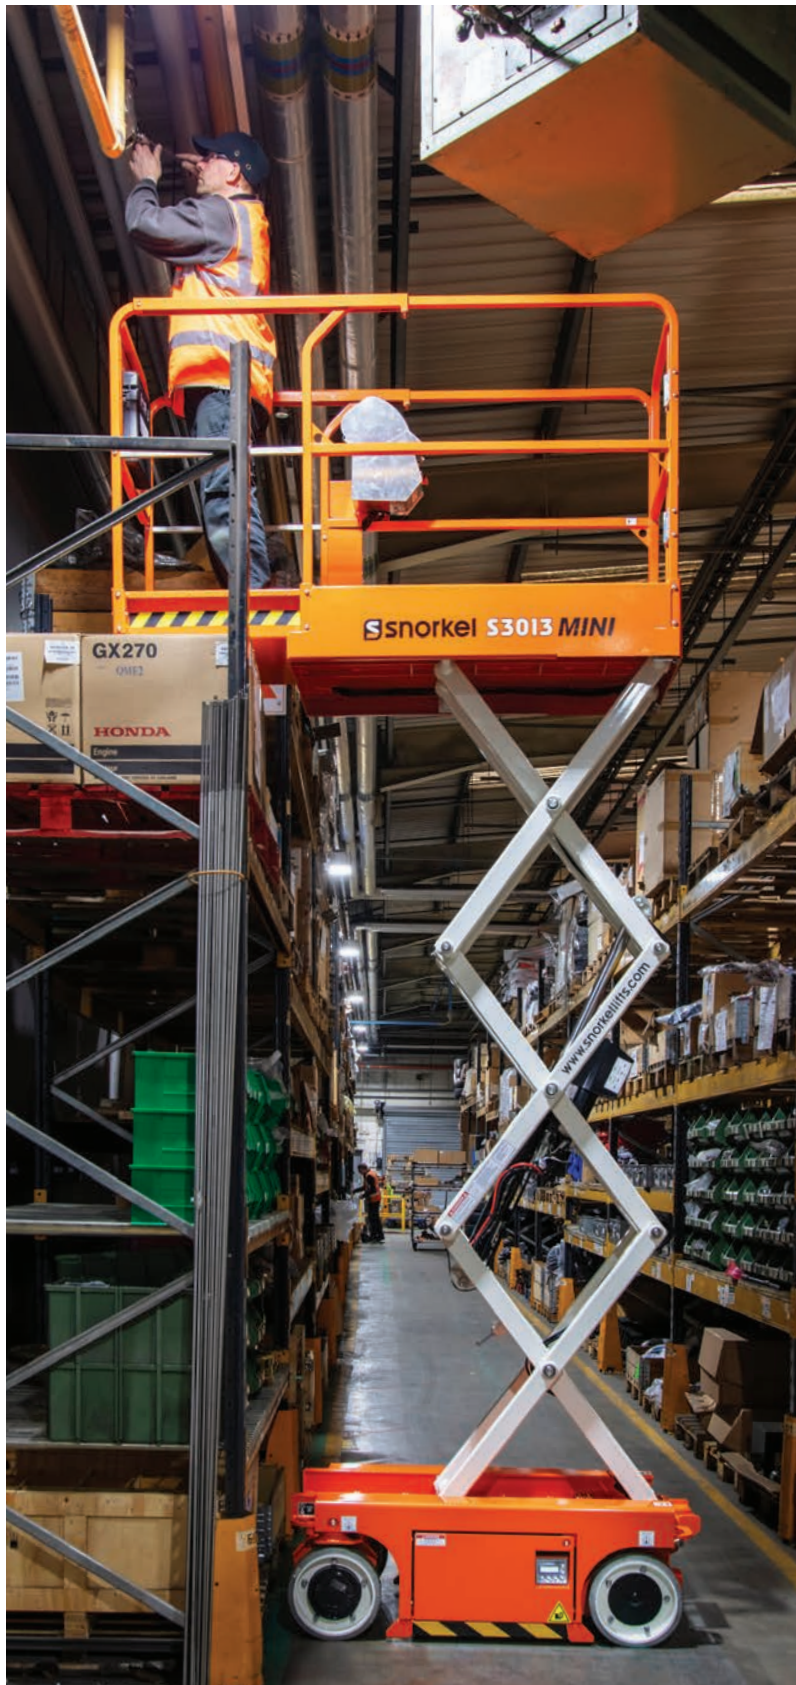

- Electrically operated
- No hydraulic hoses
- Low step-in platform height
- Fits standard doorways without folding down rails
- Suitable for indoor & outdoor operation

**snorkel**<sup>™</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

# LITHIUM ELECTRIC SLAB SCISSOR LIFT

# S3013 MINI

## DIMENSIONS

Max. Working Height	19' (5.79m)
Max. Platform Height (A)	13' (3.96m)
Platform Size (Stowed)	29.5" x 52" (0.74m x 1.32m)
Platform Size (Extended)	29.5" x 76" (0.74m x 1.93m)
Deck Extension Length	24" (0.61m)
Overall Length (B)	56.75" (1.44m)
Overall Width (C)	30" (76.2cm)
Stowed Height (D)	73" (1.85m)
Ground Clearance (Stowed)	2.63" (67mm)

## PERFORMANCE

Platform Capacity	600 lbs (272.1kg)
Max. Drive Height	13' (4.33m)
Max. Wind Speed	28 mph (12.5m/s)
Max. Drive Speed (Stowed)	2.0 mph (3.2km/h)
Max. Drive Speed (Elevated)	0.4 mph (0.6km/h)
Raise/Lower Time	32/22 sec
Gradeability	25%
Inside Turning Radius	5" (127mm)
Outside Turning Radius	58" (1.47m)
Tires (Non-marking rubber)	12.7" x 4" (32.3cm x 10.2cm)
Controls	Proportional
Drive System	2WD – electric (24V)



## POWER

Power Source	(1) 24V 60Ah Lithium battery
Charger	100–240VAC; 50–60Hz, 25amp

## WEIGHT

Weight	1,750 lbs (794kg)
--------	-------------------

## TURNING RADIUS

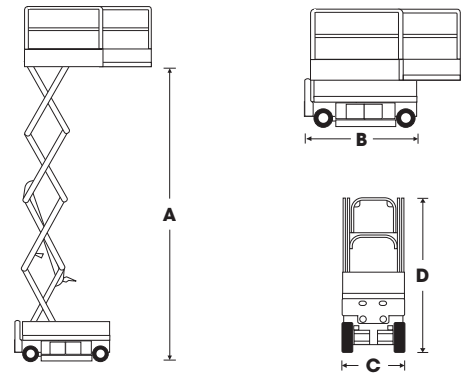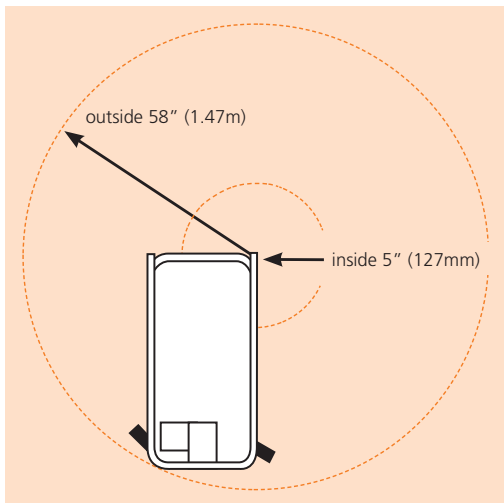

## STANDARD FEATURES

- Fully electric drive
- Fully electric steer
- Zero inside turning radius
- No hydraulic hoses
- Roll-out deck extension w/ dual locks
- Non-marking tires—largest wheels/tires in class
- Swing-out service trays
- Single-gate entry
- Descent and all-motion alarms
- Flashing amber strobe
- Proportional control, including descent
- Platform overload system
- Power to platform
- On-board diagnostics, hour meter, battery meter
- Integrated battery charger
- Heavy-duty spindles & steering mechanism
- Robust aluminum fixed control box
- Crane & forklift pockets
- Lanyard attachment points
- 2,000 charging cycles / 2-year\*\* lithium battery warranty
- 2-year parts & labor warranty
- 5-year structural warranty

## OPTIONAL FEATURES

- Environmental hydraulic oil
- Snorkel Guard™ secondary guarding system
- Special paint colors
- Safety zone lights
- Slab scissor step

**snorkel**

www.snorkellifts.com

P.O. Box 1160  
St. Joseph, MO 64502-1160, USA  
Tel: 1 (785) 989-3000  
Toll-Free: 1 (800) 255-0317  
Email: sales.usa@snorkellifts.com