

# S3215L

## LIGHTWEIGHT ELECTRIC SLAB SCISSOR LIFT



- Lightweight with low floor-loadings
- Durable design for tough jobsite conditions
- Easy to use and maintain
- Fits through standard doorways
- Ideal for indoor & outdoor sites with floor-load restrictions

**snorkel**<sup>™</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

# LIGHTWEIGHT ELECTRIC SLAB SCISSOR LIFT

# S3215L

## DIMENSIONS

Max. Working Height	21' (6.40m)
Max. Platform Height (A)	15' (4.57m)
Platform Size (Stowed)	28.25" x 73.5" (0.72m x 1.86m)
Overall Length (B)	79.4" (2.02m)
Overall Width (C)	32" (81.3cm)
Stowed Height (D)	76" (1.93m)
Ground Clearance (Stowed)	2.63" (67mm)

## PERFORMANCE

Platform Capacity	670 lbs (249kg)
Max. Drive Height	15' (4.57m)
Max. Wind Speed	28mph (12.5m/s)
Max. Drive Speed (Stowed)	2.0 mph (3.2km/h)
Max. Drive Speed (Elevated)	0.4 mph (0.6km/h)
Raise/Lower Time	20 / 38 sec
Gradeability	25%
Inside Turning Radius	4" (101mm)
Outside Turning Radius	64.25" (1.63m)
Tires (Non-marking solid rubber)	12" x 4" (30.5cm x 10.2cm)
Controls	Proportional
Drive System	2WD – hydraulic



## POWER

Power Source	(4) 6V 220Ah AGM batteries
Charger	100–240VAC; 50–60Hz, 25amp

## WEIGHT

Weight	2,100 lbs (952kg)
--------	-------------------

## TURNING RADIUS

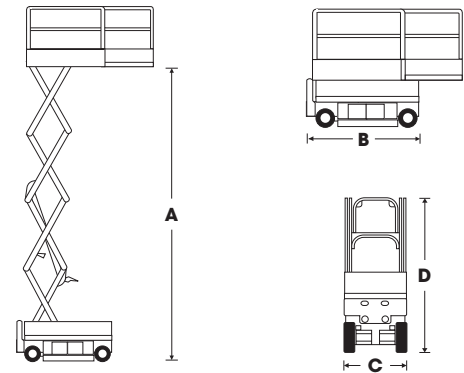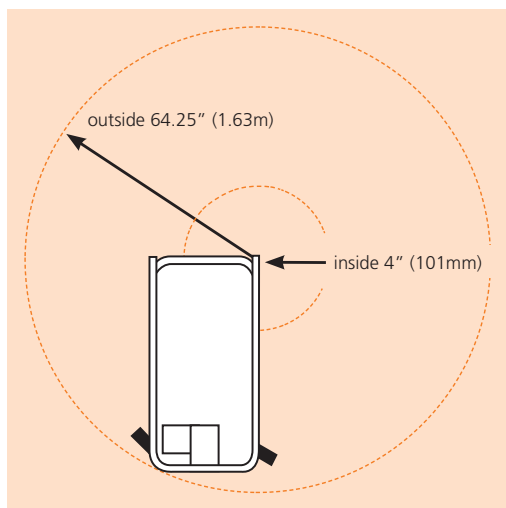

## STANDARD FEATURES

- Aluminum platform
- Non-marking tires
- Swing-out service trays
- Saloon-door-style entry gates
- Descent & All-motion alarms
- Proportional controls, including descent
- Power line to platform
- Platform overload system
- Hour meter & on-board diagnostics display
- Integrated battery charger
- Loading pendant
- Battery condition indicator
- Flashing amber strobe
- Forklift pockets, crane lifting points
- Lanyard attachment points
- Scissor stack roller slide plates (set of 2)
- 2-year parts & labor warranty
- 5-year lithium battery & structural warranty

## OPTIONAL FEATURES

- Airline to platform
- Aircraft Bumpguard package
- Environmental hydraulic oil
- Snorkel Guard™ secondary guarding system
- Special paint colors
- Safety zone lights
- Slab scissor step
- 110VAC 800W inverter

**snorkel** [www.snorkellifts.com](http://www.snorkellifts.com)

P.O. Box 1160  
St. Joseph, MO 64502-1160, USA  
Tel: 1 (785) 989-3000  
Toll-Free: 1 (800) 255-0317  
Email: sales.usa@snorkellifts.com