

# S3219PLUS/S3220MINI

## LITHIUM ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Low-level entry
- Suitable for indoor/outdoor use
- Drives through a standard doorway
- Easy to use and maintain

**snorkel**<sup>™</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

# LITHIUM ELECTRIC SLAB SCISSOR LIFTS

## S3219PLUS/S3220MINI



DIMENSIONS	S3219PLUS	S3220MINI
Max. Working Height	25' (7.62m)	26' (7.92m)
Max. Platform Height (A)	19' (5.79m)	20' (6.09m)
Platform Size (Stowed)	31.5" x 69" (80cm x 1.75m)	29.5" x 52" (75cm x 1.32m)
Platform Size (Extended)	31.5" x 105" (80cm x 2.67m)	29.5" x 76" (75cm x 1.93m)
Deck Extension Length	36" (91.4cm)	24" (61.0cm)
Overall Length (B)	72" (1.83m)	56.75" (1.44m)
Stowed Height (C)	77.9" (1.98)	78.6" (2.00m)
Overall Width (D)	32" (81.3cm)	
Ground Clearance (Stowed)	2.63" (67mm)	

PERFORMANCE	
Platform Capacity	600 lbs (272kg)
Max. Drive Height	19' (5.79m) 20' (6.09m)
Max. Wind Speed	28 mph (12.5m/s)
Max. Drive Speed (Stowed)	2.0 mph (3.2m/s)
Max. Drive Speed (Elevated)	0.4 mph (0.6m/s)
Gradeability	25%
Raise/Lower Time	40 / 22 seconds 58 / 33 seconds
Inside Turning Radius	5" (127mm)
Outside Turning Radius	58" (1.47m)
Tires (Non-marking solid rubber)	12.7" x 4" (32.3cm x 10.2cm)
Controls	Proportional
Drive System	2WD – electric (24V)

POWER	
Power Source	(2) 24V 60Ah Lithium batteries
Charger	100–240VAC; 50–60Hz, 25amp

WEIGHT	
Weight	2,900 lbs (1,315kg) 2,400 lbs (1,088kg)

### TURNING RADIUS

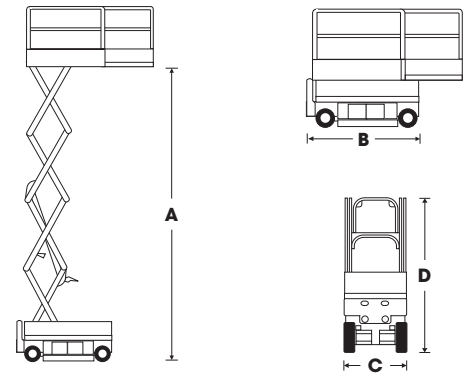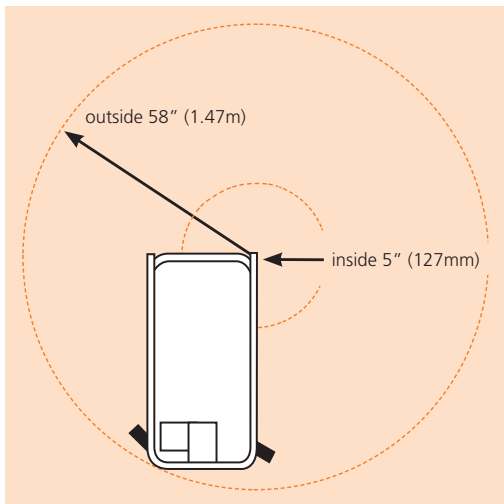

### STANDARD FEATURES

- Fully electric drive
- Fully electric steer
- Zero inside turning radius
- No hydraulic hoses
- Roll-out deck extension w/ dual locks
- Non-marking tires
- Swing-out service trays
- Single-gate entry
- Descent and all-motion alarms
- Flashing amber strobe
- Proportional control, including descent
- Platform overload system
- Power to platform
- On-board diagnostics, hour meter, battery meter
- Integrated battery charger
- Crane & forklift pockets
- Lanyard attachment points
- 2,000 charging cycles / 2-year\*\* lithium battery warranty
- 2-year parts & labor warranty
- 5-year structural warranty

### OPTIONAL FEATURES

- Environmental hydraulic oil
- Special paint colors
- Safety zone lights
- Slab scissor step

**snorkel**

P.O. Box 1160  
St. Joseph, MO 64502-1160, USA  
Tel: 1 (785) 989-3000  
Toll-Free: 1 (800) 255-0317  
Email: sales.usa@snorkellifts.com

www.snorkellifts.com