

# S3220E/S3226E

## ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact, nimble & easy to use
- Suitable for indoor/outdoor use
- Drives through standard doorways

**snorkel**<sup>™</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

# ELECTRIC SLAB SCISSOR LIFTS


DIMENSIONS	S3220E	S3226E
Max. Working Height	26' (7.92m)	32' (9.75m)
Max. Platform Height (A)	20' (6.09m)	26' (7.92m)
Platform Size (Stowed)	28.25" x 84.38" (0.71m x 2.14m)	
Platform Size (Extended)	28.25" x 102.38" (0.71m x 2.60m)	
Deck Extension Length	36" (91.4cm)	
Overall Length (B)	90.6" (2.30m)	
Overall Width (C)	32" (81.3cm)	
Stowed Height (D)	85.25" (2.17m)	90.5" (2.30m)
Ground Clearance (Stowed)	3.75" (95mm)	

PERFORMANCE		
Platform Capacity	900 lbs (408kg)	550 lbs (249kg)
Max. Drive Height	20' (6.09m)	26' (7.92m)
Max. Wind Speed	28 mph (12.5m/s)	
Max. Drive Speed (Stowed)	2.0 mph (3.2m/s)	
Max. Drive Speed (Elevated)	0.4 mph (0.6m/s)	
Gradeability	25%	
Raise/Lower Time	34 / 43 seconds	50 / 56 seconds
Inside Turning Radius	30" (76.2cm)	
Outside Turning Radius	93" (2.36m)	
Tires (Non-marking solid rubber)	15" x 4" (38.1cm x 10.2cm)	
Controls	Proportional	
Drive System	2WD – hydraulic	


POWER	
Power Source	(4) 6V 240Ah AGM batteries
Charger	100–240VAC; 50–60Hz, 25amp

WEIGHT		
Weight	4,500 lbs (2,041kg)	5,000 lbs (2,268kg)

## TURNING RADIUS

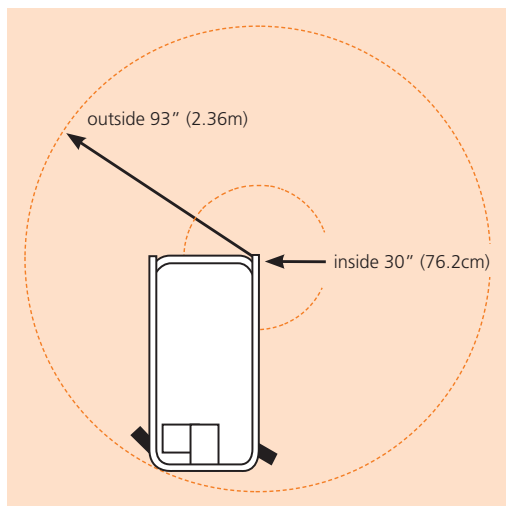

# S3220E/S3226E

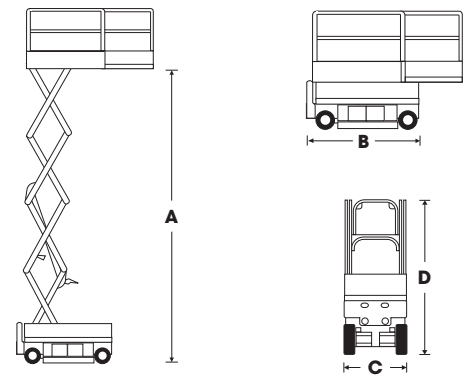

## STANDARD FEATURES

- Roll-out-deck extension w/ dual locks
- Non-marking tires
- Swing-out service trays
- Saloon-door-style entry gates
- Descent & All-motion alarms
- Proportional controls, including descent
- Power line to platform
- Platform overload system
- Hour meter & on-board diagnostics display
- Integrated battery charger
- Loading pendant
- Battery condition indicator
- Flashing amber strobe
- Forklift pockets, crane lifting points
- Lanyard attachment points
- Scissor stack roller slide plates (set of 2)
- 2-year parts & labor warranty
- 5-year lithium battery & structural warranty

## OPTIONS

- 110VAC 800W inverter
- Airline to platform
- Aircraft Bumpguard package
- Environmental hydraulic oil
- Panel carrier
- Snorkel Guard™ secondary guarding system
- Special paint colors
- Safety zone lights
- Slab scissor step
- Top rail

**snorkel**

P.O. Box 1160  
St. Joseph, MO 64502-1160, USA  
Tel: 1 (785) 989-3000  
Toll-Free: 1 (800) 255-0317  
Email: sales.usa@snorkellifts.com

www.snorkellifts.com