

S9033RT/S9043RT/S9053RT

LARGE-DECK ROUGH-TERRAIN SCISSOR LIFTS



- Large-deck diesel rough-terrain scissor lifts
- Excellent rough-terrain performance
- Powered deck extension
- Ideal for construction applications

snorkel[™]
www.snorkellifts.com

LARGE-DECK ROUGH-TERRAIN SCISSOR LIFTS


DIMENSIONS	S9033RT	S9043RT	S9053RT
Max. Working Height	39' (11.88m)	49' (14.93m)	59' (17.98m)
Max. Platform Height (A)	33' (10.05m)	43' (13.10m)	53' (16.15m)
Platform Size (Stowed)	12' 11" x 7' 4" (3.93m x 2.23m)		
Platform Size (Single-deck ext.)	17' 6" x 7' 4" (5.33m x 2.23m)		
Platform Size (Opt. dual-deck ext.)	21' 10" x 7' 4" (6.65m x 2.23m)		
Deck Extension Length	4' 8" (1.42m)		
Overall Length w/ Outriggers (B)	15' 8" (4.77m)		
Overall Width (C)	7' 6" (2.28m)		
Stowed Height (D)	9' 3" (2.82m)	9' 11" (3.02m)	10' 8" (3.25m)
Ground Clearance (Stowed)	11" (279mm)		

PERFORMANCE			
Platform Capacity	2,500 lbs (1,134kg)	1,500 lbs (680kg)	1,500 lbs (680kg)
Max. Drive Height	33' (10.05m)	43' (13.10m)	53' (16.15m)
Max. Wind Speed	28 mph (12.5m/s)		
Max. Drive Speed (Stowed)	4.0 mph (6.4m/s)		
Max. Drive Speed (Elevated)	0.3 mph (0.48m/s)		
Gradeability	45%	45%	40%
Outrigger Leveling (Side-to-side)	12° max.		
Outrigger Leveling (Front-to-back)	7° max.		
Inside Turning Radius	6' 8" (2.03m)		
Outside Turning Radius	17' 4" (5.28m)		
Raise/Lower Time	48 / 48 seconds	48 / 48 seconds	55 / 50 seconds
Tires (Foam-filled)	315/55D20-12PR		
Controls	Proportional joystick		
Drive System	4WD – hydraulic		


POWER	
Power Source	25hp Kubota V1505 diesel / 39hp Kubota WG1605 DF

WEIGHT			
Weight (w/ Outriggers)	16,830 lbs (7,634kg)	18,530 lbs (8,405kg)	20,550 lbs (9,321kg)
Weight (No Outriggers)	15,000 lbs (6,804kg)	16,820 lbs (7,629kg)	n/a

TURNING RADIUS

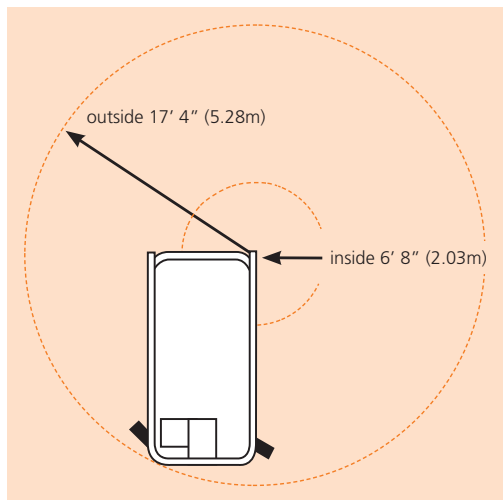

S9033RT S9043RT/S9053RT

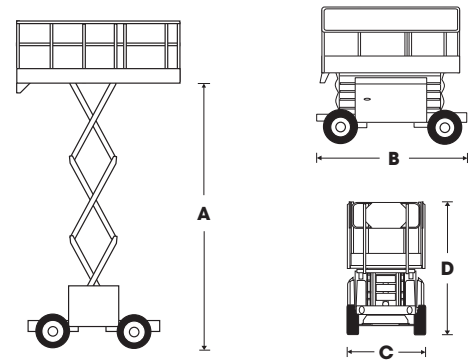

STANDARD FEATURES

- 4-wheel drive
- (4) Hydraulic outriggers w/ auto-leveling (S9053RT)
- Single powered-deck extension
- Foam-filled tires
- Proportional controls
- Power line to platform
- Platform overload system
- Fold-down guardrails
- Flashing amber strobes (x2)
- Locking oscillating axle
- Manual lowering valve
- Lanyard attachment points
- Hour meter & on-board diagnostics display
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- Hydraulic generator 110V 2kW
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Dual-powered outriggers
- (4) Hydraulic outriggers w/ auto-leveling (S9033RT / S9043RT)
- Non-marking foam-filled tires
- Special paint colors

snorkel

www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-Free: 1 (800) 255-0317
Email: sales.usa@snorkellifts.com