

S2255RT/S2755RT

NARROW ROUGH-TERRAIN SCISSOR LIFTS



- Narrow bi-energy rough-terrain scissor lifts
- Excellent rough-terrain performance
- Roll-out deck extension
- Ideal for indoor/outdoor work in confined spaces

snorkel[™]
www.snorkellifts.com

NARROW ROUGH-TERRAIN SCISSOR LIFTS


DIMENSIONS	S2255RT	S2755RT
Max. Working Height	26' (7.92m)	31' 6" (9.60m)
Max. Platform Height (A)	20' (6.09m)	25' 6" (7.77m)
Platform Size (Stowed)	4' 7" x 8' 11" (1.40m x 2.72m)	
Platform Size (Extended)	4' 7" x 13' 7" (1.40m x 4.14m)	
Deck Extension Length	5' 2" (1.57m)	
Overall Length (B)	11' (3.35m)	
Overall Width (C)	4' 9" (1.45m)	
Stowed Height (D)	7' 8" (2.34m)	8' 3" (2.51m)
Ground Clearance (Stowed)	6.2" (157mm)	5.5" (140mm)

PERFORMANCE		
Platform Capacity	925 lbs (420kg)	660 lbs (300kg)
Max. Drive Height	20' (6.09m)	25' 6" (7.77m)
Max. Wind Speed	28 mph (12.5m/s)	
Max. Drive Speed (Stowed)	3.2 mph (5.15m/s)	
Max. Drive Speed (Elevated)	0.4 mph (0.68m/s)	0.3 mph (0.48m/s)
Gradeability	35%	
Outrigger Leveling (Side-to-side)	10° max.	
Outrigger Leveling (Front-to-back)	6° max.	
Raise/Lower Time	26 / 40 seconds	
Inside Turning Radius	8' 2" (2.49m)	
Outside Turning Radius	15' 7" (4.75m)	
Tires (Non-marking rubber)	23" x 8.9" (58.4cm x 22.6cm)	
Controls	Proportional joystick	
Drive System	4WD – hydraulic	


POWER	
Power Source	22.5hp Kubota diesel engine (Optional: Bi-energy w/ added 24V DC batteries)

WEIGHT		
Weight	5,313 lbs (2,410kg)	6,063 lbs (2,750kg)
Weight (Bi-energy)	6,084 lbs (2,760kg)	6,835 lbs (3,100kg)

TURNING RADIUS

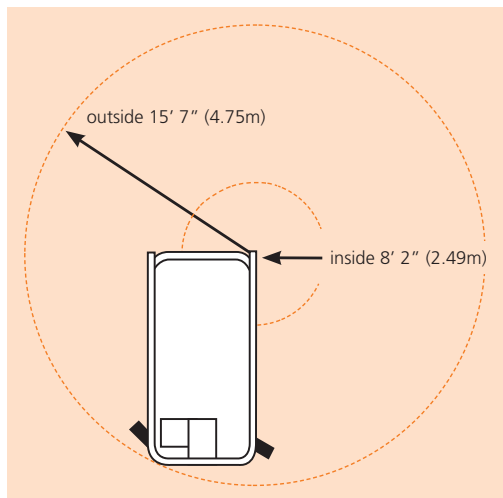

S2255RT / S2755RT

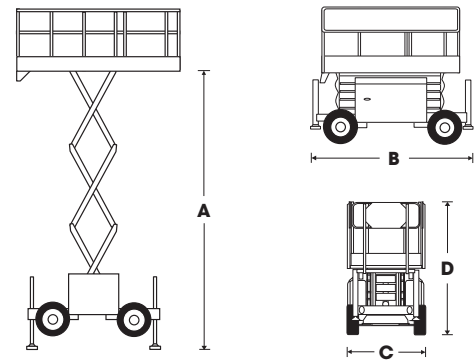

STANDARD FEATURES

- 4-wheel drive
- (4) Hydraulic stabilizers w/ auto-leveling
- Roll-out deck extension
- Non-marking foam-filled tires
- Proportional controls
- Power line to platform
- Drive motion alarm
- Descent alarm
- Flashing amber strobe
- Oscillating axle
- Manual lowering valve
- Lanyard attachment points
- Hour meter
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- DC & diesel Bi-energy battery package (24V)
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Additional 111Ah battery system
- Special paint colors

snorkel

www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-Free: 1 (800) 255-0317
Email: sales.usa@snorkellifts.com