

S2770RT/S3370RT/S3970RT

COMPACT ROUGH-TERRAIN SCISSOR LIFTS



- Compact bi-energy rough-terrain scissor lifts
- Excellent rough-terrain performance
- Roll-out deck extension
- Ideal for indoor/outdoor work in confined spaces

snorkel[™]
www.snorkellifts.com

COMPACT ROUGH-TERRAIN SCISSOR LIFTS

S2770RT S3370RT/S3970RT

DIMENSIONS	S2770RT	S3370RT	S3970RT
Max. Working Height	33' 2" (10.11m)	39' 2" (11.89m)	43' 9" (13.34m)
Max. Platform Height (A)	27' 2" (8.28m)	33' 2" (10.11m)	37' 9" (11.51m)
Platform Size (Stowed)	8' 11" x 5' 5" (2.72m x 1.65m)		
Platform Size (Extended)	13' 5" x 5' 5" (4.09m x 1.65m)		
Deck Extension Length	4' (1.22m)		
Overall Length (B)	11' (3.35m)		
Overall Width (C)	5' 11" (1.80m)		
Stowed Height (D)	8' 7" (2.61m)	9' 1.5" (2.78m)	9' 7" (2.92m)
Ground Clearance (Stowed)	13.8" (350mm)		

PERFORMANCE

Platform Capacity	1,250 lbs (567kg)	1,000 lbs (454kg)	770 lbs (350kg)
Max. Drive Height	27' 2" (8.28m)	33' 2" (10.11m)	37' 9" (11.51m)
Max. Wind Speed	28mph (12.5m/s)		
Max. Drive Speed (Stowed)	2.8mph (4.5m/s)		
Max. Drive Speed (Elevated)	0.3mph (0.5m/s)	0.2mph (0.3m/s)	0.2mph (0.3m/s)
Gradeability	35%	35%	30%
Outrigger Leveling (Side-to-side)	10° max.		
Outrigger Leveling (Front-to-back)	6° max.		
Inside Turning Radius	8' 10" (2.69m)		
Outside Turning Radius	16' 3" (4.95m)		
Raise/Lower Time	26 / 30 seconds	50 / 60 seconds	50 / 60 seconds
Tires (Non-marking foam-filled)	27" x 10.5" (68.6cm x 26.7cm)		
Controls	Proportional joystick		
Drive System	4WD – hydraulic		



POWER

Power Source 22.5hp Kubota diesel engine
(Optional: Bi-energy w/ added (4) 6V 305Ah batteries)

WEIGHT

Weight	6,363 lbs (2,886kg)	7,980 lbs (3,620kg)	8,355 lbs (3,790kg)
Weight (Bi-energy)	7,134 lbs (3,226kg)	8,752 lbs (3,970kg)	9,127 lbs (4,110kg)

TURNING RADIUS

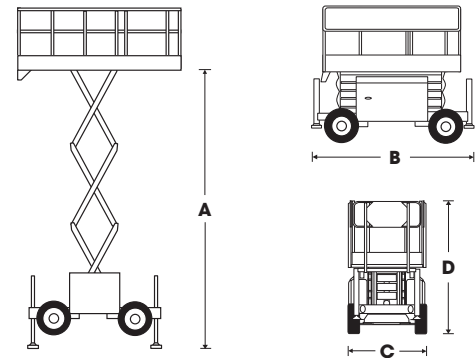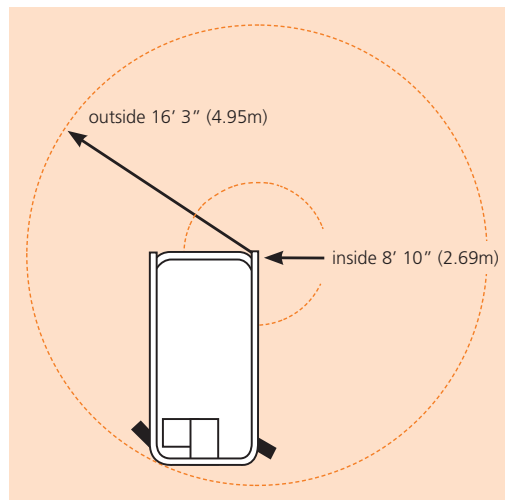

STANDARD FEATURES

- 4-wheel drive
- (4) Hydraulic stabilizers w/ auto-leveling
- Roll-out deck extension
- Non-marking foam-filled tires
- Proportional controls
- Power line to platform
- Drive motion alarm
- Descent alarm
- Flashing amber strobe
- Oscillating axle
- Manual lowering valve
- Lanyard attachment points
- Hour meter
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- DC & diesel Bi-energy battery package (24V)
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Additional 111Ah battery system
- Special paint colors

snorkel www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-Free: 1 (800) 255-0317
Email: sales.usa@snorkellifts.com