

# A46JRT/JRTE

## ROUGH-TERRAIN ARTICULATING BOOM LIFTS



- Powerful rough-terrain articulating boom lift
- Simple to operate and maintain
- Zero-emission compatible
- Superb working envelope and no tailswing
- Ideal for both maintenance and construction applications

 **snorkel**<sup>™</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

# ROUGH-TERRAIN ARTICULATING BOOM LIFTS

# A46JRT/JRTE



DIMENSIONS	A46JRT	A46JRTE
Max. Working Height	52' 11" (16.13m)	
Max. Platform Height	46' 11" (14.30m)	
Max. Horizontal Reach	24' 11" (7.59m)	
Clearance Height @ Max. Outreach	25' 2" (7.67m)	
Platform Size	39" x 6' (0.99m x 1.83m)	
Overall Length (A)	18' 8" (5.68m)	
Overall Width (B)	6' 10" (2.08m)	
Stowed Height (C)	7' 2" (2.18m)	
Ground Clearance	13" (330mm)	

PERFORMANCE		
Platform Capacity	500 lbs (227kg)	600 lbs (272kg)
Max. Drive Height	46' 11" (14.03m)	
Max. Wind Speed	28mph (12.5m/s)	
Max. Drive Speed (Stowed)	4.25mph (6.8km/h)	3.2mph (5.14km/h)
Max. Drive Speed (Elevated)	0.8mph (1.28km/h)	
Gradeability	45%	
Jib Length	5' (1.52m)	
Jib Arc	140°	
Platform Rotation	160°	
Superstructure Rotation (Non-continuous)	360°	
Tailswing	0" (0.0m)	
Raise / Lower Time	101 / 98 seconds	
Inside Turning Radius	2' 8" (0.81m)	
Outside Turning Radius	10' 5" (3.17m)	
Tires (Foam-filled lug)	355/55 D625	
Controls	Proportional	
Drive System	4WD	

POWER		
Power Source	24.9hp Kubota V1505 diesel engine	333Ah Li-ion batteries w/ integrated BMS

WEIGHT	
Weight	16,620 lbs (7,539kg)

## WORKING ENVELOPE

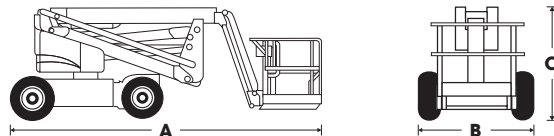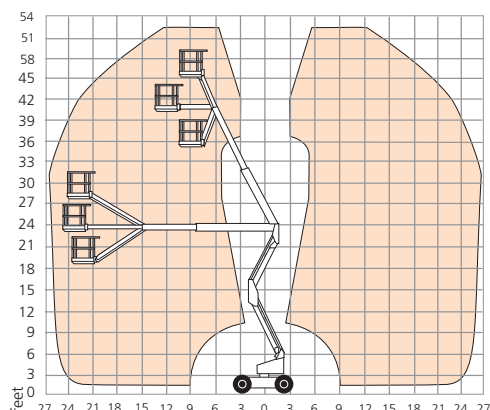

## STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- Multi-function proportional controls
- Oscillating front axle
- Zero tailswing
- Tri-entry platform
- Power line to platform
- Platform overload system
- Hour meter & on-board diagnostics display
- Foam-filled tires
- Drive motion alarm
- Tilt alarm & cut out
- Flashing amber strobe
- Horn
- 2,000 charging cycles / 5-year\*\* lithium battery warranty
- 2-year parts & labor warranty
- 5-year structural warranty

## OPTIONS

- 5' aluminum platform with swing-gate
- AC Generator 110V/2.5kW (single phase)
- Airline to platform
- Environmental hydraulic oil
- Maintenance-free batteries
- Non-marking tires
- Pneumatic tires
- PFAS
- Special paint colors
- Tool tray

**snorkel**

P.O. Box 1160  
St. Joseph, MO 64502-1160, USA  
Tel: 1 (785) 989-3000  
Toll-Free: 1 (800) 255-0317  
Email: sales.usa@snorkellifts.com

www.snorkellifts.com