

S4726E/S4732E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & robust
- Suitable for indoor/outdoor use
- Ideal for construction and maintenance applications
- Roll-out decks extension for extra reach

snorkel[™]
www.snorkellifts.com

ELECTRIC SLAB SCISSOR LIFTS


DIMENSIONS	S4726E	S4732E
Max. Working Height	32' (9.75m)	38' (11.58m)
Max. Platform Height (A)	26' (7.92m)	32' (9.75m)
Platform Size (Stowed)	43" x 84.38" (1.09m x 2.14m)	
Platform Size (Extended)	43" x 132.38" (1.09m x 3.36m)	
Deck Extension Length	48" (1.21m)	
Overall Length (B)	90.6" (2.30m)	
Overall Width (C)	47" (1.19m)	
Stowed Height (D)	90.2" (2.29m)	94.2" (2.39m)
Ground Clearance (Stowed)	2.63" (67mm)	

PERFORMANCE		
Platform Capacity	1,000 lbs (454kg)	770 lbs (349kg)
Max. Drive Height	26' (7.92m)	32' (9.75m)
Max. Wind Speed	28 mph (12.5m/s)	
Max. Drive Speed (Stowed)	2.0 mph (3.2m/s)	
Max. Drive Speed (Elevated)	0.4 mph (0.6m/s)	
Gradeability	25%	
Raise/Lower Time	50 / 58 seconds	
Inside Turning Radius	21" (53.3cm)	
Outside Turning Radius	95" (2.41m)	
Tires (Non-marking solid rubber)	15" x 5" (38.1cm x 12.7cm)	
Controls	Proportional	
Drive System	2WD – hydraulic	


POWER	
Power Source	(4) 6V 240Ah AGM batteries
Charger	100–240VAC; 50–60Hz, 25amp

WEIGHT		
Weight	4,750 lbs (2,154kg)	5,700 lbs (2,585kg)

TURNING RADIUS

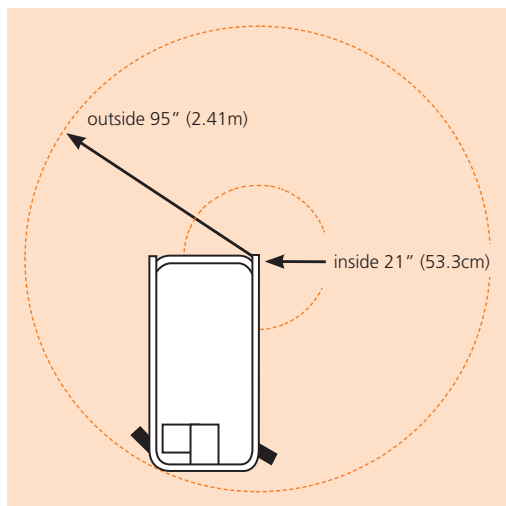

S4726E/S4732E

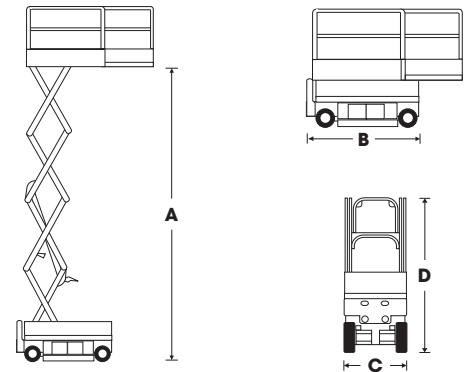

STANDARD FEATURES

- Roll-out-deck extension w/ dual locks
- Non-marking tires
- Swing-out service trays
- Saloon-door-style entry gates
- Operates at full height indoor & outdoor
- Descent & All-motion alarms
- Proportional controls, including descent
- Loading pendant
- Power line to platform
- Platform overload system
- Hour meter & on-board diagnostics display
- Integrated battery charger
- Battery condition indicator
- Flashing amber strobe
- Crane & forklift pockets
- Lanyard attachment points
- Scissor stack roller slide plates (set of 2)
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- 110VAC 800W inverter
- Airline to platform
- Aircraft Bumpguard package
- Environmental hydraulic oil
- Pipe rack
- Panel carrier
- Snorkel Guard™ secondary guarding system
- Special paint colors
- Safety zone lights
- Slab scissor step
- Top rail

snorkel

www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-Free: 1 (800) 255-0317
Email: sales.usa@snorkellifts.com