

S9031RT-HC/S9043RT-HC

LARGE-DECK HIGH-CAPACITY ROUGH-TERRAIN SCISSOR LIFTS



- Ultra-high capacity, large-deck rough-terrain scissor lifts
- Excellent rough-terrain performance
- Dual-powered extension decks
- Ideal for heavy-duty construction applications

 **snorkel**[™]
www.snorkellifts.com

LARGE-DECK HIGH-CAPACITY ROUGH-TERRAIN SCISSOR LIFTS

S9031RT-HC S9043RT-HC



DIMENSIONS	S9031RT-HC	S9043RT-HC
Max. Working Height	37' (11.27m)	49' (14.93m)
Max. Platform Height (A)	31' (9.45m)	43' (13.10m)
Platform Size (Stowed)	18' x 7' 4" (5.48m x 2.23m)	
Platform Size (Extended)	27' 4" x 7' 4" (8.33m x 2.23m)	
Deck Extension Length	4' 8" (1.42m)	
Overall Length (B)	16' 10" (5.13m)	
Overall Width (C)	7' 6" (2.28m)	
Stowed Height (D)	9' 6" (2.89m)	
Ground Clearance (Stowed)	8.7" (221mm)	

PERFORMANCE		
Platform Capacity	4,000 lbs (1,814kg)	3,500 lbs (1,587kg)
Max. Drive Height	31' (9.45m)	43' (13.10m)
Max. Wind Speed	28mph (12.5m/s)	
Max. Drive Speed (Stowed)	4.0mph (6.4m/s)	
Max. Drive Speed (Elevated)	0.3mph (0.48km/s)	
Gradeability	45%	
Outrigger Leveling (Side-to-side)	12° max.	
Outrigger Leveling (Front-to-rear)	7° max.	
Raise/Lower Time	50 / 48 seconds	
Inside Turning Radius	6' 8" (2.03m)	
Outside Turning Radius	17' 4" (5.28m)	
Tires (Foam-filled)	355/55D625	
Controls	Proportional joystick	
Drive System	4WD – hydraulic	

POWER	
Power Source	61hp Kubota V2403 diesel -or- 55hp Kubota WG2503 Dual-fuel

WEIGHT		
Weight	19,683 lbs (8,928kg)	22,340 lbs (10,133kg)

TURNING RADIUS

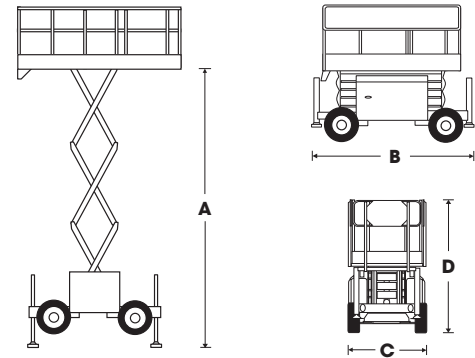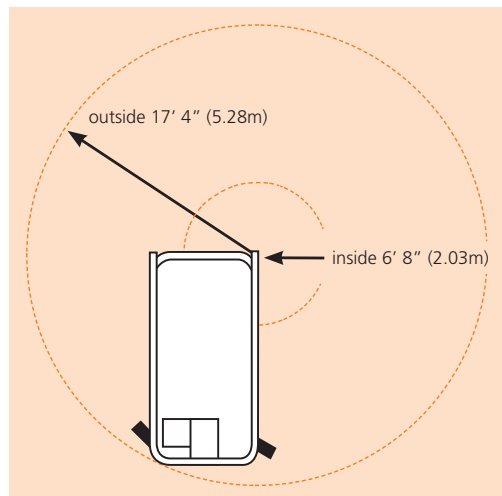

STANDARD FEATURES

- 4-wheel drive
- (4) Hydraulic outriggers w/ auto-leveling
- Dual powered extension decks
- Foam-filled tires
- Proportional controls
- Power line to platform
- Platform overload system
- Fold-down guardrails
- Flashing amber strobes (x2)
- Locking oscillating axle
- Hour meter & on-board diagnostics display
- Manual lowering valve
- Lanyard attachment points
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONS

- Hydraulic generator 110V 2kW
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Non-marking foam-filled tires
- Special paint colors

snorkel

www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-Free: 1 (800) 255-0317
Email: sales.usa@snorkellifts.com